


Flowmeters for Liquids SF2000

- * For Liquids
- * Linearity 3% from value
- * Repeatability < 0.5% from value
- * Range 0.1 - 35 LPM
- * Temperature Range - 20 ... + 100 °C
- * K-Factor up to 22.000 Pulses/liter
- * Pressure up to 25 bar
- * Frequency Output
- * RF Transmission wireless
- * DIC connector or Faston
- * Maintenance free

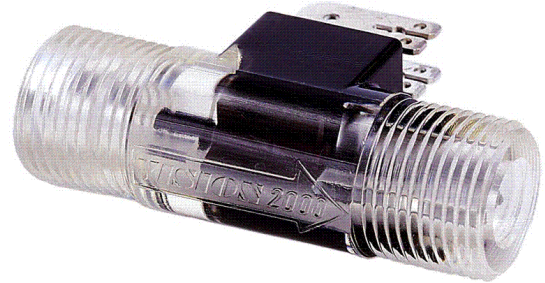

Turbine Flowmeters SF2000 are intended for flow measurements of not abrasive liquids. They are mainly used at applications where small and precise installation is demanded. The Flowmeters are maintenance free and their performance is independent of the installed position. They can be used in the production of oil and gas burners, cooling systems, washing machines, coffee machines, automatic filling equipment, blending processes, chemical and pharmaceutical plants, agriculture, automotive industry, etc.

Because of the hydro and aerodynamic form, the rotor moves resistance free inside the body in the stream of the measured medium. A working pressure of up to 25 bars can be reached. It is recommended to filter the liquid with 20-40 µm Filter. To prevent turbulences inside the Flowmeter assure a straight entry pipe of at least 100mm and the outlet of at least 50mm.

SPECIFICATIONS

TYPE	SF2005 2F66 (*)	SF2006 4F44	SF2006 2F66	SF2008 4F17	SF2008 4F22	SF2008 4F44	SF2008 2F66
Flow Range LPM:	0.1-2.5	1-10	0.5-5	2-35	1-25	1-15	0.5-7.5
DN (mm):	5	6	6	8	8	8	8
Resolution Pulses/Litre	22.000	3300	6900	750	1000	2200	4700
Frequency (Hz)	33-833	55-550	58-575	25-437	16-416	37-550	38-575
Thread	G 1/4" or NPT 1/4"	G 3/8" or NPT 3/8"					
Medium	Non abrasive liquids, filtering with 20-40 µm Filter is recommended						
Material	Case: Grilamid TR55 (PA12), Rotor: PA12 Ferrite, Bearings: PTFE/Graphite						
Viscosity Range	0.8 ... 16 mm ² / sec						
Linearity	± 3% from momentary value						
Repeatability	< 0.5 %						
Temperature Range	- 20 ... + 100 °C						
Working Pressure	25 bar						
Destroy Pressure	200 bar						
Supply	5-24V DC, 8 mA						
Principle of operation	Hall Sensor / magnetic						
Output Signal	Open Collector NPN, max. 20mA sink						
Electrical Terminals	AMP Faston 2.8/6.3 x 0.8mm or DIN Micro-EN60529 or Cable						

(*) **SF2005-SF66** can also be used for Methanol and Ethanol

Pressure Drop in bar (H₂O @ 20°C)


Flow Rate	SF2008 4F16.5	SF2008 4F23	SF2008 4F44	SF2006 4F44	SF2008 F66	SF2006 2F66	SF2005 2F66
1 LPM	0	0	0	0	0	0	0.05
2 LPM	0	0	0	0.05	0	0.06	0.15 @ 1.5LPM
5 LPM	0	0.05	0.05	0.2	0.12	0.2	
10 LPM	0.15	0.17	0.2	0.4	0.4	0.7	
15 LPM	0.25	0.27	0.4				
20 LPM	0.45	0.48					
25 LPM	0.60	0.65					
30 LPM	0.92						

Regulations for operation and installation

1. Check for media compatibility! Sensor material: Grilamid TR55 (PA12)
2. Insert a filter for solid particles in the measured medium
3. Use in clean installation pipes only
4. Check the electric connection according to the diagram
5. Do not exceed limits
6. The measuring principle is based on volumetric method. Air bubbles in the liquid will be measured.
7. Correctly installed, the sensor works completely free of maintenance.
8. The flow turbines have to be installed by instructed personal only.

The information and data are based upon tests, material, and records which we consider reliable. Before commercial utilization it is recommended to check each application thoroughly and, irrespective of the technical data, to make sure of the appropriateness of the application.

Electric Connections

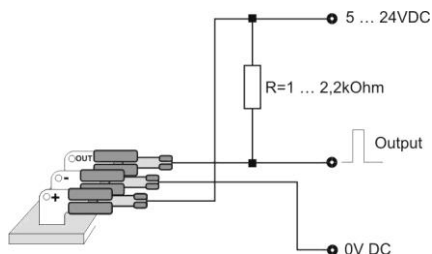

Terminals



ABOUT ORBIT CONTROLS INSTRUMENTATION

Flowmeters SF2000 can be directly connected to Orbit Controls digital controllers, transmitters and large remote displays. The instruments measure and display the flow rate, cumulate the totals, provide exact automatic dosing in filling machines, control set points, count batches, generate analogue signals and communicate with PCs and other intelligent controllers. The digital displays can be scaled in required flow units such as LPM or GPM. For more details consult our website www.orbitcontrols.ch



Flow Controller OC7171-3D